


LB-1500 - DEWATERING PUMPS

LB-1500 Slimline design pumps fit into 8" pipes. Powerful pump built with durable materials in an easy handling design. Top discharge provides maximum motor cooling efficiency allowing continuous duty operation at low levels and extended dry-run capability.

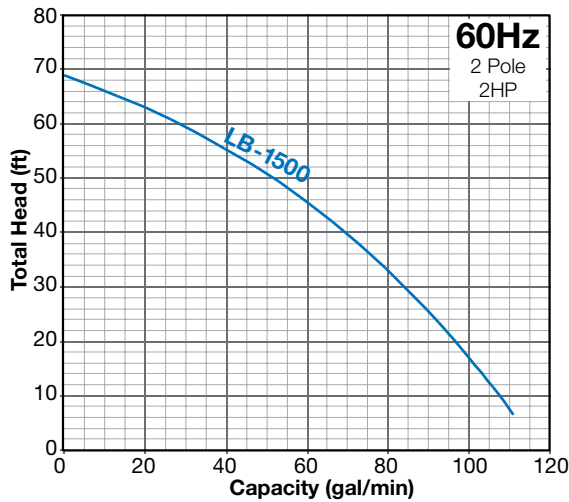

LB-1500 Features

- Circle Thermal Motor Protector: Protects against overheating, over amperage & run-dry
- Anti-Wicking Block: Prevents water incursion due to capillary wicking should the power cable be damaged or the end submerged
- Oil Lifter: Lubricates the seal faces and extends seal life by ten times using no additional power, even when oil is down to 1/3 normal level.
- Dual inside mechanical seals with silicon carbide faces, (both top and bottom) running in an oil filled chamber provides for the most durable seal design available
- High Chrome Iron Semi-Open Impeller resists wear from abrasive particles
- Synthetic Rubber Pump Casting: For wear resistance and easy maintenance
- V-Ring System: Protects the shaft seals

Optional Accessories - See page 24-27

- Float switch TS-304
- Discharge hoses
- Quick connect fittings
- Control panel
- 2" discharge

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Height		
LB-1500	2	Single	3 (2)*	50	7 3/8	23 5/16	3 1/8	85

*2" is optional